

HYOSUNG HEAVY INDUSTRIE		SPEED - TORQUE & CURRENT CURVE			Curve No.	
ITIOSUINU INDUSTRIE:	5				1ST_D1ML20603	
OUTPUT	55	kW	POLES	6	Р	
VOLTAGE	-	V	FREQUENCY	60	Hz	
FULL LOAD TORQUE	45.0	kg∙m	FULL LOAD CURRENT	-	А	
LOCKED ROTOR TORQUE	140	%	LOCKED-ROTOR CURREN	T 600	%	
BREAKDOWN TORQUE	190	%	SPEED (at FULL LOAD)	1190	r/min	
GD ² of LOAD :	-	kg∙m²	GD ² of MOTOR	7.383	kg∙m²	

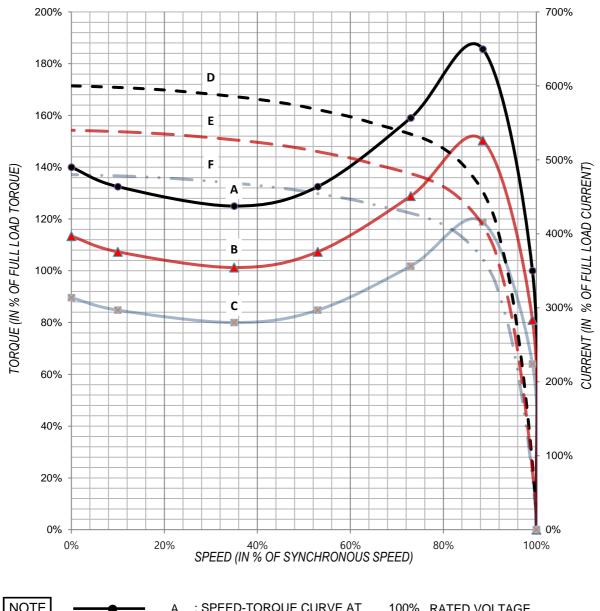

NOTE		Α	: SPEED-TORQUE CURVE AT	100%	RATED VOLTAGE
	_	В	: SPEED-TORQUE CURVE AT	90%	RATED VOLTAGE
		С	: SPEED-TORQUE CURVE AT	80%	RATED VOLTAGE
		D	: SPEED-CURRENT CURVE AT	100%	RATED VOLTAGE
		Е	: SPEED-CURRENT CURVE AT	90%	RATED VOLTAGE
		F	: SPEED-CURRENT CURVE AT	80%	RATED VOLTAGE

HYOSUNG HEAVY INDUSTRIES	THERMAL LIMIT & TIME - CURRENT CURVE			Curve No.	
ITIOSUING INDUSTRIES				1TL_D1ML20603	
OUTPUT	55	kW	POLES	6	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	45.0	kg∙m	FULL LOAD CURRENT	-	А
LOCKED ROTOR TORQUE	140	%	LOCKED-ROTOR CURREN	т 600	%
BREAKDOWN TORQUE	190	%	SPEED (at FULL LOAD)	1190	r/min
GD ² of LOAD :	-	kg∙m²	GD ² of MOTOR	7.383	kg·m²

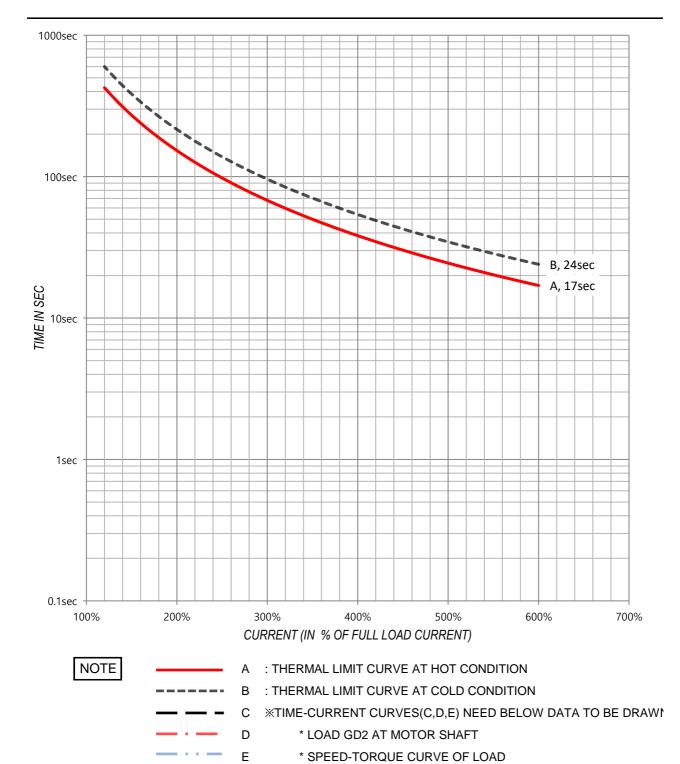

HYOSUNG HEAVY INDUSTRIES	LOAD - POWER FACTOR & EFFICIENCY CURVE			Curve No.	
				1PE_D1ML20603	
OUTPUT	55	kW	POLES	6	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	45.0	kg∙m	FULL LOAD CURRENT	-	А
LOCKED ROTOR TORQUE	140	%	LOCKED-ROTOR CURREN	NT 600	%
BREAKDOWN TORQUE	190	%	SPEED (at FULL LOAD)	1190	r/min
GD ² of LOAD :	-	kg∙m²	GD ² of MOTOR	7.383	kg∙m²

