
HYOSUNG HEAVY INDUSTRIES

SPEED - TORQUE & CURRENT CURVE

Curve No.

1ST_D1ML20604

OUTPUT	75	kW	POLES	6	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	61.6	kg·m	FULL LOAD CURRENT	-	Α
LOCKED ROTOR TORQUE	120	%	LOCKED-ROTOR CURRENT	570	%
BREAKDOWN TORQUE	170	%	SPEED (at FULL LOAD)	1185	r/min
GD ² of LOAD :	-	kg·m²	GD ² of MOTOR	8.116	kg·m²

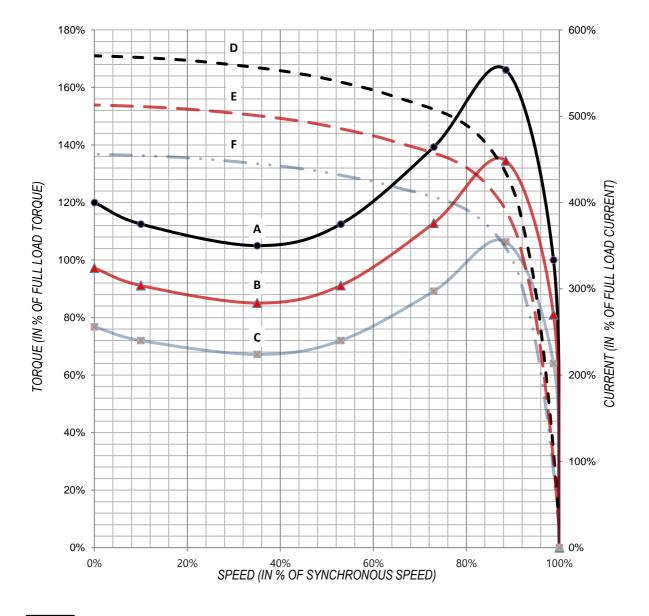

NOTE 100% RATED VOLTAGE : SPEED-TORQUE CURVE AT : SPEED-TORQUE CURVE AT 90% RATED VOLTAGE : SPEED-TORQUE CURVE AT 80% RATED VOLTAGE D : SPEED-CURRENT CURVE AT 100% RATED VOLTAGE : SPEED-CURRENT CURVE AT 90% RATED VOLTAGE : SPEED-CURRENT CURVE AT 80% RATED VOLTAGE




THERMAL LIMIT & TIME - CURRENT CURVE

Curve No.

1	Т	L	D1	M	L2	06	04

OUTPUT	75	kW	POLES	6	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	61.6	kg∙m	FULL LOAD CURRENT	-	Α
LOCKED ROTOR TORQUE	120	%	LOCKED-ROTOR CURRENT	570	%
BREAKDOWN TORQUE	170	%	SPEED (at FULL LOAD)	1185	r/min
GD ² of LOAD :	-	$kg \cdot m^2$	GD ² of MOTOR	8.116	$kg \cdot m^2$

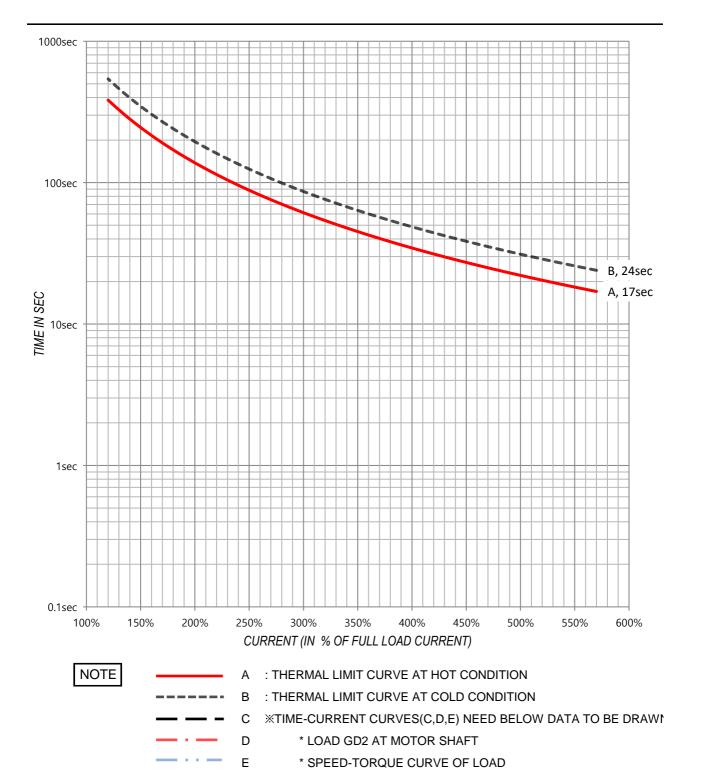




LOAD - POWER FACTOR & EFFICIENCY CURVE

Curve No.

1PE_D1ML20604

OUTPUT	75	kW	POLES	6	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	61.6	kg·m	FULL LOAD CURRENT	-	Α
LOCKED ROTOR TORQUE	120	%	LOCKED-ROTOR CURRENT	570	%
BREAKDOWN TORQUE	170	%	SPEED (at FULL LOAD)	1185	r/min
GD ² of LOAD :	-	kg·m²	GD ² of MOTOR	8.116	kg·m²

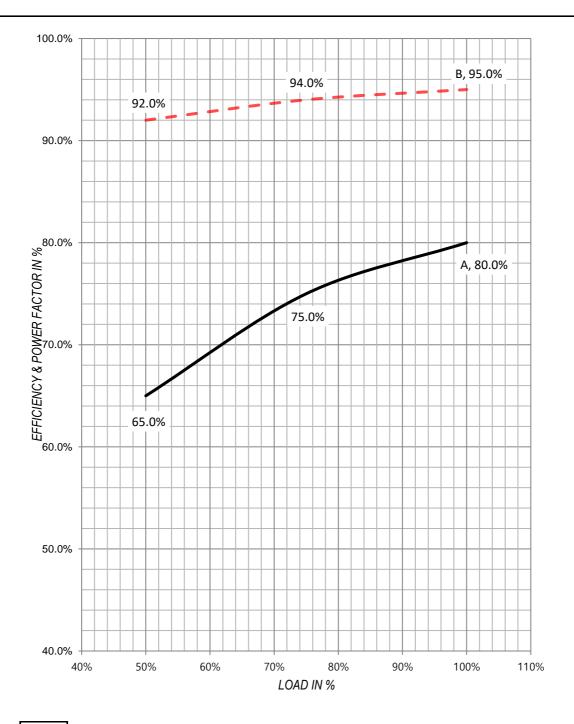

NOTE

A : LOAD - POWER FACTOR CURVE

B : LOAD - EFFICIENCY CURVE