
#### HYOSUNG HEAVY INDUSTRIES


### SPEED - TORQUE & CURRENT CURVE

Curve	No.
-------	-----

1ST\_D1ML20671

OUTPUT	22	kW	POLES	8	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	24.5	kg∙m	FULL LOAD CURRENT	-	Α
LOCKED ROTOR TORQUE	125	%	LOCKED-ROTOR CURRENT	550	%
BREAKDOWN TORQUE	200	%	SPEED (at FULL LOAD)	875	r/min
GD <sup>2</sup> of LOAD :	-	$kg \cdot m^2$	GD <sup>2</sup> of MOTOR	3.04	kg·m²

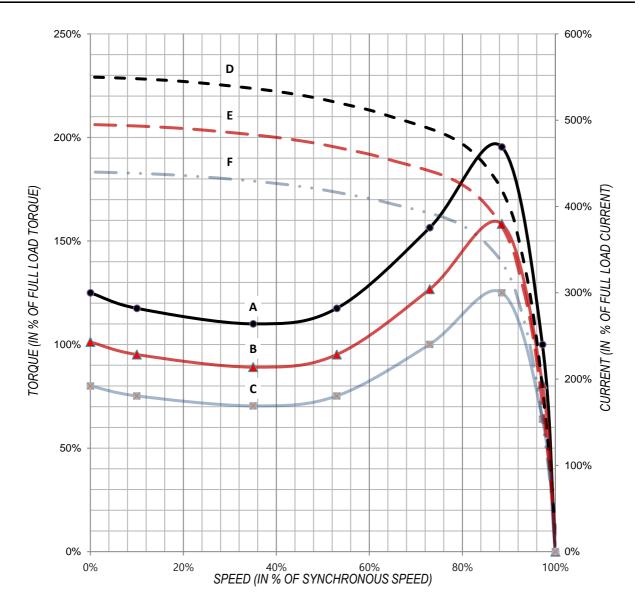

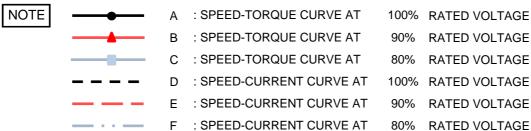




# THERMAL LIMIT & TIME - CURRENT CURVE

Curve No.

1TL\_D1ML20671

OUTPUT	22	kW	POLES	8	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	24.5	kg∙m	FULL LOAD CURRENT	-	Α
LOCKED ROTOR TORQUE	125	%	LOCKED-ROTOR CURRENT	550	%
BREAKDOWN TORQUE	200	%	SPEED (at FULL LOAD)	875	r/min
GD <sup>2</sup> of LOAD :	-	$kg \cdot m^2$	GD <sup>2</sup> of MOTOR	3.04	kg·m²

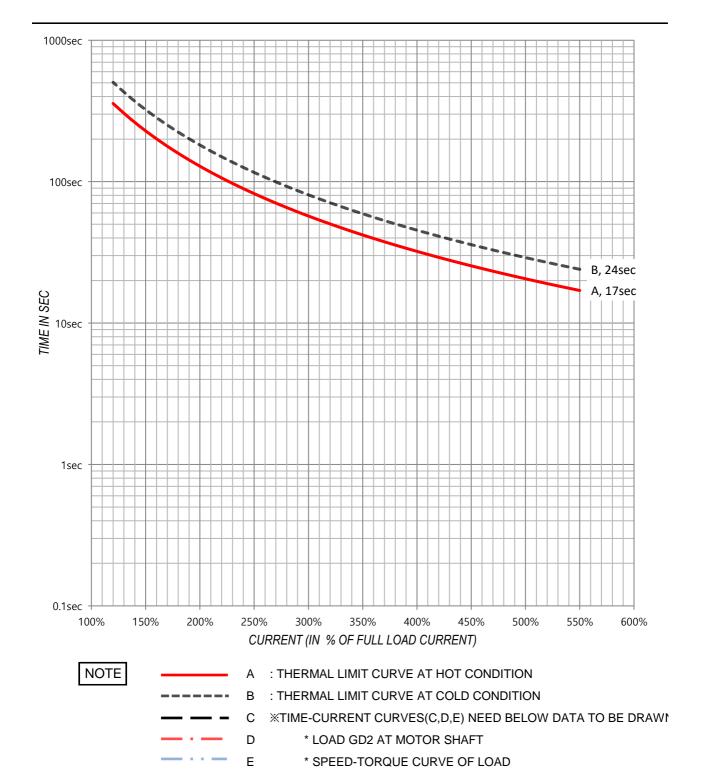


#### HYOSUNG HEAVY INDUSTRIES

# LOAD - POWER FACTOR & EFFICIENCY CURVE

Curve No.

1PE\_D1ML20671

OUTPUT	22	kW	POLES	8	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	24.5	kg·m	FULL LOAD CURRENT	=	Α
LOCKED ROTOR TORQUE	125	%	LOCKED-ROTOR CURRENT	550	%
BREAKDOWN TORQUE	200	%	SPEED (at FULL LOAD)	875	r/min
GD <sup>2</sup> of LOAD :	-	$kg \cdot m^2$	GD <sup>2</sup> of MOTOR	3.04	kg·m²

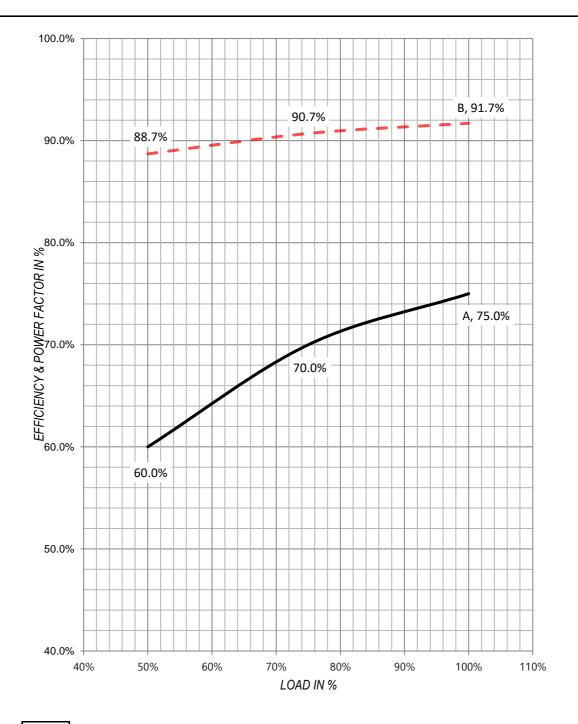

NOTE

A : LOAD - POWER FACTOR CURVE

B : LOAD - EFFICIENCY CURVE