
HYOSUNG HEAVY INDUSTRIES


SPEED - TORQUE & CURRENT CURVE

Curve No.

1ST_DSML20694H

OUTPUT	18.5	kW	POLES	6	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	15.3	kg∙m	FULL LOAD CURRENT	-	Α
LOCKED ROTOR TORQUE	190	%	LOCKED-ROTOR CURRENT	600	%
BREAKDOWN TORQUE	240	%	SPEED (at FULL LOAD)	1180	r/min
GD ² of LOAD :	-	$kg \cdot m^2$	GD ² of MOTOR	1.583	kg·m²

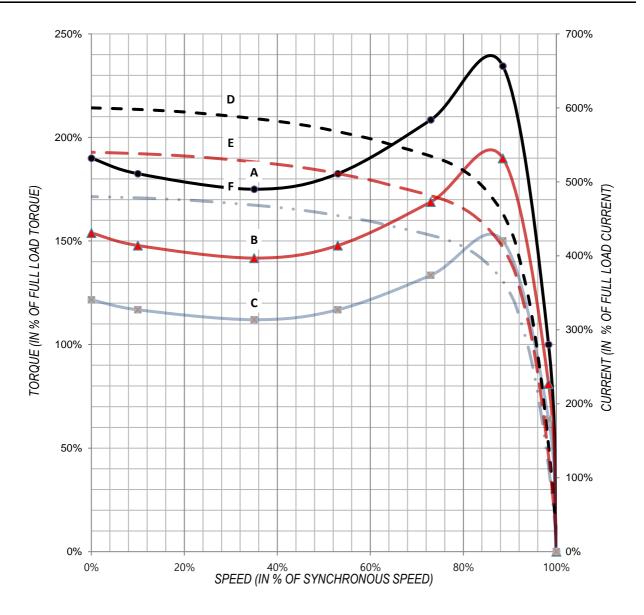

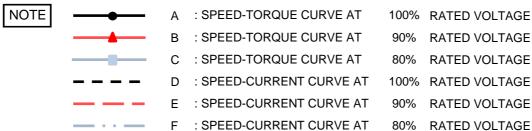




THERMAL LIMIT & TIME - CURRENT CURVE

Curve No.

1TL_DSML20694H

OUTPUT	18.5	kW	POLES	6	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	15.3	kg·m	FULL LOAD CURRENT	-	Α
LOCKED ROTOR TORQUE	190	%	LOCKED-ROTOR CURRENT	600	%
BREAKDOWN TORQUE	240	%	SPEED (at FULL LOAD)	1180	r/min
GD ² of LOAD :	-	kg·m²	GD ² of MOTOR	1.583	$kg \cdot m^2$

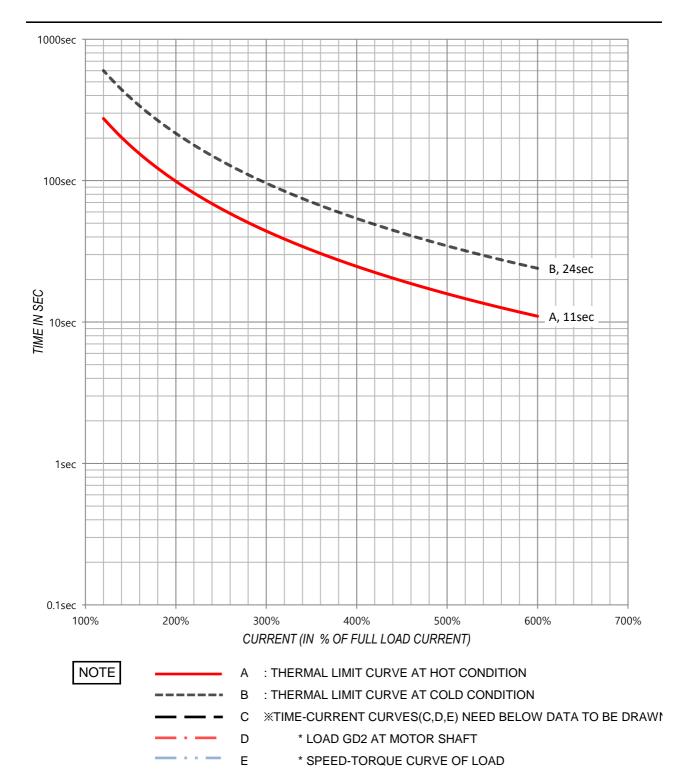




LOAD - POWER FACTOR & EFFICIENCY CURVE

Curve No.

1PE_DSML20694H

OUTPUT	18.5	kW	POLES	6	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	15.3	kg·m	FULL LOAD CURRENT	-	Α
LOCKED ROTOR TORQUE	190	%	LOCKED-ROTOR CURRENT	600	%
BREAKDOWN TORQUE	240	%	SPEED (at FULL LOAD)	1180	r/min
GD ² of LOAD :	-	$kg \cdot m^2$	GD ² of MOTOR	1.583	kg·m²

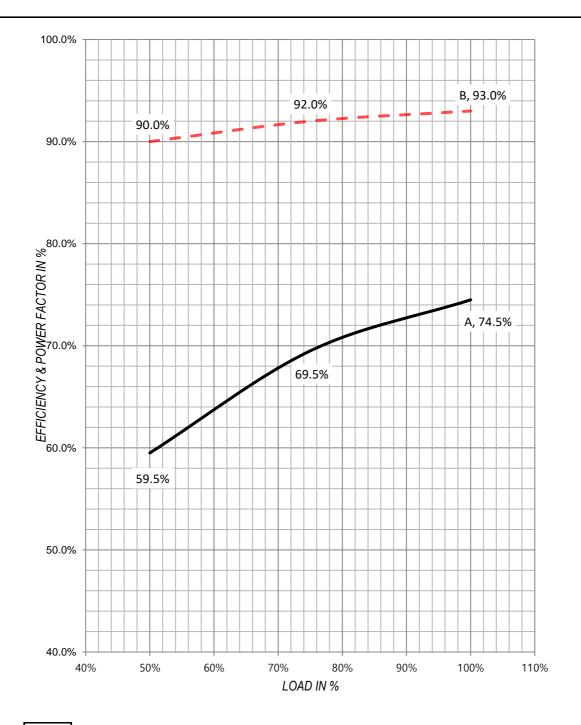

NOTE

A : LOAD - POWER FACTOR CURVE

B : LOAD - EFFICIENCY CURVE