

HYOSUNG HEAVY INDUSTRIES	SPEED - TORQUE & CURRENT CURVE			Curve No.	
				1ST_DSML21412H	
OUTPUT	7.5	kW	POLES	8	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	8.3	kg∙m	FULL LOAD CURRENT	-	А
LOCKED ROTOR TORQUE	130	%	LOCKED-ROTOR CURREN	IT 520	%
BREAKDOWN TORQUE	170	%	SPEED (at FULL LOAD)	880	r/min
$\mathrm{GD}^2$ of LOAD :	-	kg∙m²	GD <sup>2</sup> of MOTOR	1.038	kg∙m²

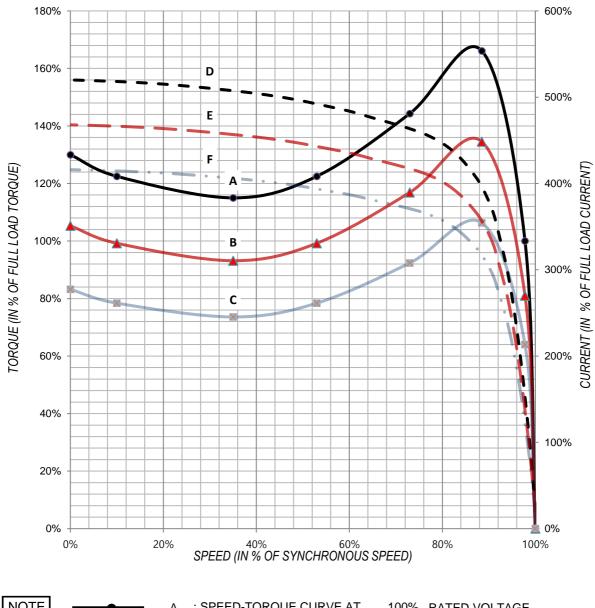

NOTE	<b>—</b>	А	: SPEED-TORQUE CURVE AT	100%	RATED VOLTAGE
	<b>_</b>	В	: SPEED-TORQUE CURVE AT	90%	RATED VOLTAGE
		С	: SPEED-TORQUE CURVE AT	80%	RATED VOLTAGE
		D	: SPEED-CURRENT CURVE AT	100%	RATED VOLTAGE
		Е	: SPEED-CURRENT CURVE AT	90%	RATED VOLTAGE
		F	: SPEED-CURRENT CURVE AT	80%	RATED VOLTAGE

HYOSUNG HEAVY INDUSTRIES	THERMAL LIMIT & TIME - CURRENT CURVE			Curve No.	
				1TL_DSML21412H	
OUTPUT	7.5	kW	POLES	8	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	8.3	kg∙m	FULL LOAD CURRENT	-	А
LOCKED ROTOR TORQUE	130	%	LOCKED-ROTOR CURREN	NT 520	%
BREAKDOWN TORQUE	170	%	SPEED (at FULL LOAD)	880	r/min
GD <sup>2</sup> of LOAD :	-	kg∙m²	GD <sup>2</sup> of MOTOR	1.038	kg∙m²

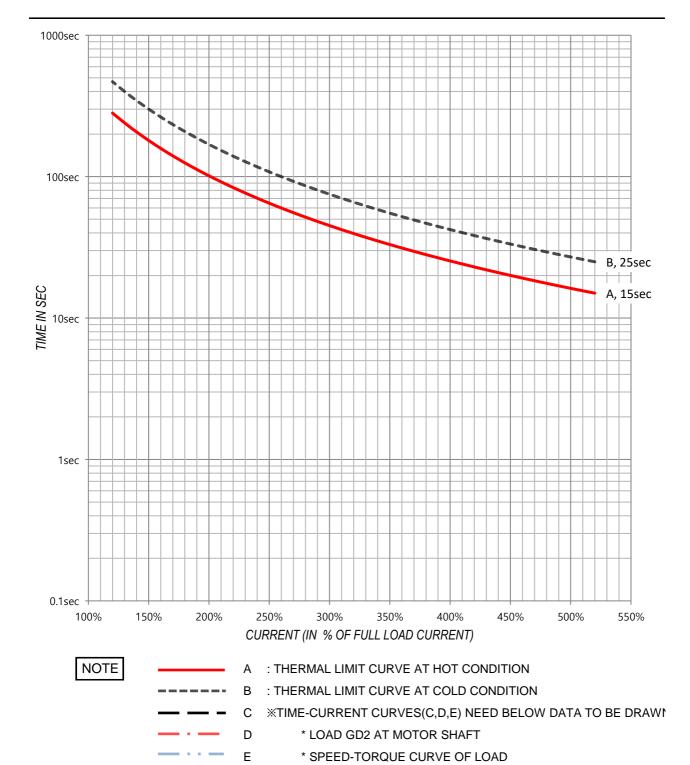

HYOSUNG HEAVY INDUSTRIES				Curve No.			
		& EFFICIENCY CURVE			1PE_DSML21412H		
OUTPUT	7.5	kW	POLES	8	Р		
VOLTAGE	-	V	FREQUENCY	60	Hz		
FULL LOAD TORQUE	8.3	kg∙m	FULL LOAD CURRENT	-	А		
LOCKED ROTOR TORQUE	130	%	LOCKED-ROTOR CURRE	NT 520	%		
BREAKDOWN TORQUE	170	%	SPEED (at FULL LOAD)	880	r/min		
GD <sup>2</sup> of LOAD :	-	kg∙m²	GD <sup>2</sup> of MOTOR	1.038	kg∙m²		

