
HYOSUNG HEAVY INDUSTRIES	SPEED - TORQUE & CURRENT CURVE			Curve No.	
				1ST_DSML21422M	
OUTPUT	0.75	kW	POLES	4	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	0.4	kg∙m	FULL LOAD CURRENT	-	А
LOCKED ROTOR TORQUE	200	%	LOCKED-ROTOR CURRE	ENT 660	%
BREAKDOWN TORQUE	250	%	SPEED (at FULL LOAD)	1735	r/min
GD ² of LOAD :	-	kg∙m²	GD ² of MOTOR	0.013	kg∙m²

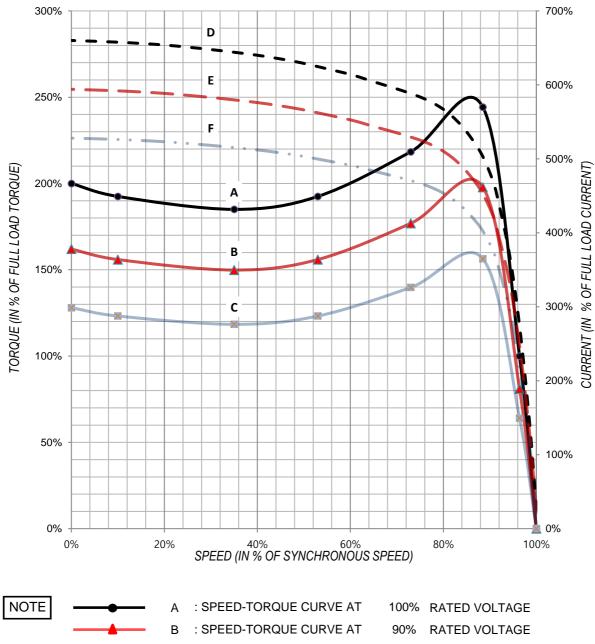

 B
 : SPEED-TORQUE CURVE AT
 90%
 RATED VOLTAGE


 C
 : SPEED-TORQUE CURVE AT
 80%
 RATED VOLTAGE

 D
 : SPEED-CURRENT CURVE AT
 100%
 RATED VOLTAGE

 E
 : SPEED-CURRENT CURVE AT
 90%
 RATED VOLTAGE

 F
 : SPEED-CURRENT CURVE AT
 80%
 RATED VOLTAGE

HYOSUNG HEAVY INDUSTRIES		TH	IERMAL LIMIT &	Curve No. 1TL_DSML21422M	
ITIOSUNG INDUSTRIES	T	IME ·	- CURRENT CURVE		
OUTPUT	0.75	kW	POLES	4	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	0.4	kg∙m	FULL LOAD CURRENT	-	А
LOCKED ROTOR TORQUE	200	%	LOCKED-ROTOR CURREN	NT 660	%
BREAKDOWN TORQUE	250	%	SPEED (at FULL LOAD)	1735	r/min
GD ² of LOAD :	-	kg∙m²	GD ² of MOTOR	0.013	kg∙m²

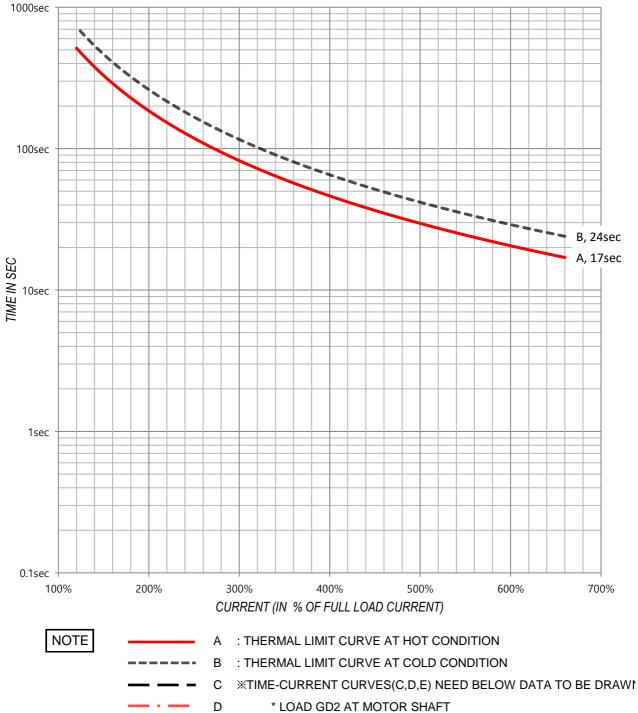

* LOAD GD2 AT MOTOR SHAFT

* SPEED-TORQUE CURVE OF LOAD Е

HYOSUNG HEAVY INDUSTRIES	LOAD - POWER FACTOR & EFFICIENCY CURVE			Curve No.	
ITIOSUNG INDUSTRIES				1PE_DSML21422M	
OUTPUT	0.75	kW	POLES	4	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	0.4	kg∙m	FULL LOAD CURRENT	-	А
LOCKED ROTOR TORQUE	200	%	LOCKED-ROTOR CURRE	ENT 660	%
BREAKDOWN TORQUE	250	%	SPEED (at FULL LOAD)	1735	r/min
GD ² of LOAD :	-	kg∙m²	GD ² of MOTOR	0.013	kg∙m²

