
HYOSUNG HEAVY INDUSTRIES

SPEED - TORQUE & CURRENT CURVE

Curve No.

1ST_DSML5820H

OUTPUT	0.75	kW	POLES	8	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	0.9	kg·m	FULL LOAD CURRENT	-	Α
LOCKED ROTOR TORQUE	180	%	LOCKED-ROTOR CURRENT	600	%
BREAKDOWN TORQUE	250	%	SPEED (at FULL LOAD)	850	r/min
GD ² of LOAD :	-	kg·m²	GD ² of MOTOR	0.065	kg·m²

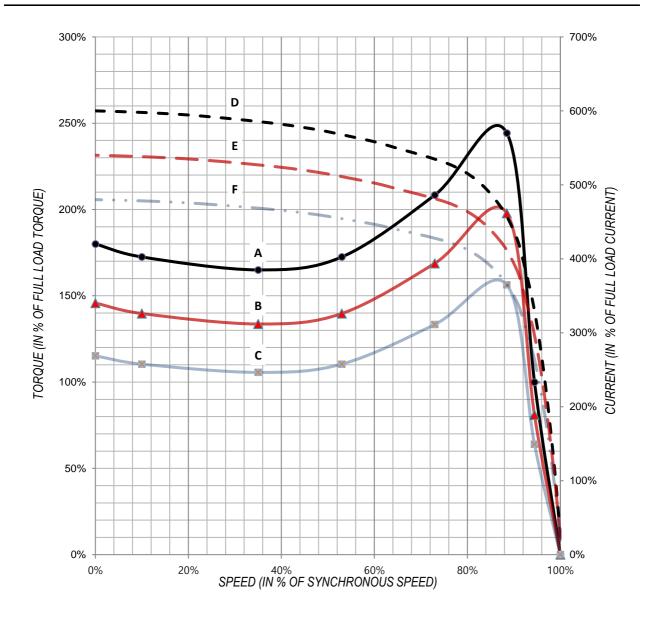

NOTE 100% RATED VOLTAGE : SPEED-TORQUE CURVE AT : SPEED-TORQUE CURVE AT 90% RATED VOLTAGE : SPEED-TORQUE CURVE AT 80% RATED VOLTAGE D : SPEED-CURRENT CURVE AT 100% RATED VOLTAGE : SPEED-CURRENT CURVE AT RATED VOLTAGE 90% : SPEED-CURRENT CURVE AT 80% RATED VOLTAGE




THERMAL LIMIT & TIME - CURRENT CURVE

Curve No.

1TL_DSML5820H

OUTPUT	0.75	kW	POLES	8	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	0.9	kg·m	FULL LOAD CURRENT	-	Α
LOCKED ROTOR TORQUE	180	%	LOCKED-ROTOR CURRENT	600	%
BREAKDOWN TORQUE	250	%	SPEED (at FULL LOAD)	850	r/min
GD ² of LOAD :	-	kg·m²	GD ² of MOTOR	0.065	kg·m²

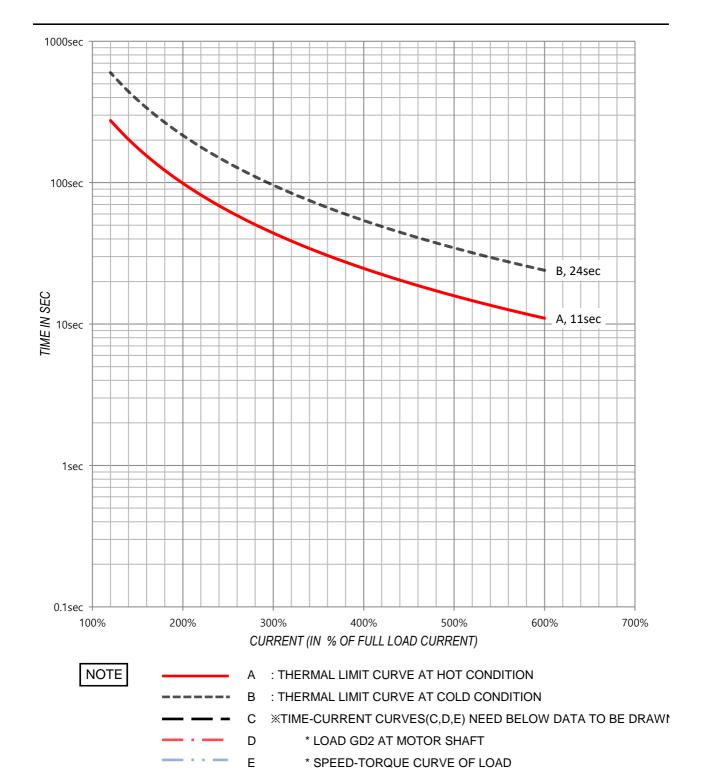


HYOSUNG HEAVY INDUSTRIES

LOAD - POWER FACTOR & EFFICIENCY CURVE

Curve No.

1PE_DSML5820H

OUTPUT	0.75	kW	POLES	8	Р
VOLTAGE	-	V	FREQUENCY	60	Hz
FULL LOAD TORQUE	0.9	kg·m	FULL LOAD CURRENT	-	Α
LOCKED ROTOR TORQUE	180	%	LOCKED-ROTOR CURRENT	600	%
BREAKDOWN TORQUE	250	%	SPEED (at FULL LOAD)	850	r/min
GD ² of LOAD:	-	kg·m²	GD ² of MOTOR	0.065	$\text{kg}{\cdot}\text{m}^2$

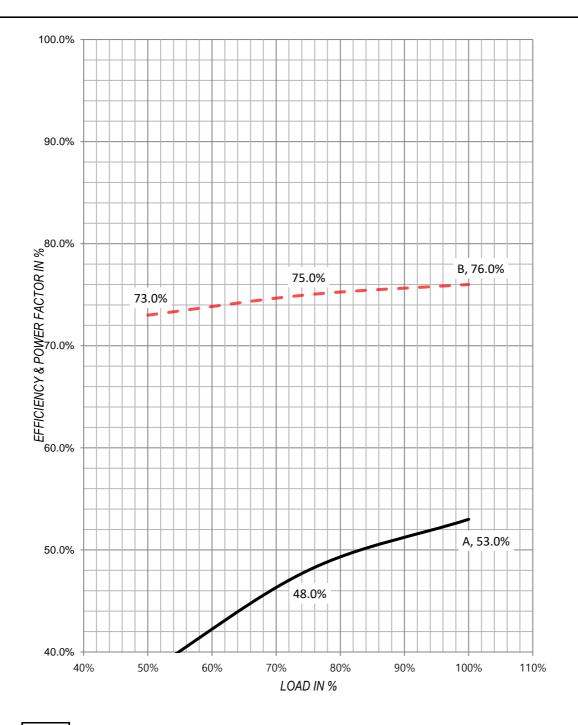

NOTE

A : LOAD - POWER FACTOR CURVE

B : LOAD - EFFICIENCY CURVE