


SPEED - TORQUE & CURRENT CURVE

Curve No.

1ST_D1ML7752


OUTPUT	45 kW	POLES	8 P
VOLTAGE	- V	FREQUENCY	60 Hz
FULL LOAD TORQUE	49.5 kg·m	FULL LOAD CURRENT	- A
LOCKED ROTOR TORQUE	120 %	LOCKED-ROTOR CURRENT	450 %
BREAKDOWN TORQUE	180 %	SPEED (at FULL LOAD)	885 r/min
GD ² of LOAD :	- kg·m ²	GD ² of MOTOR	8.54 kg·m ²

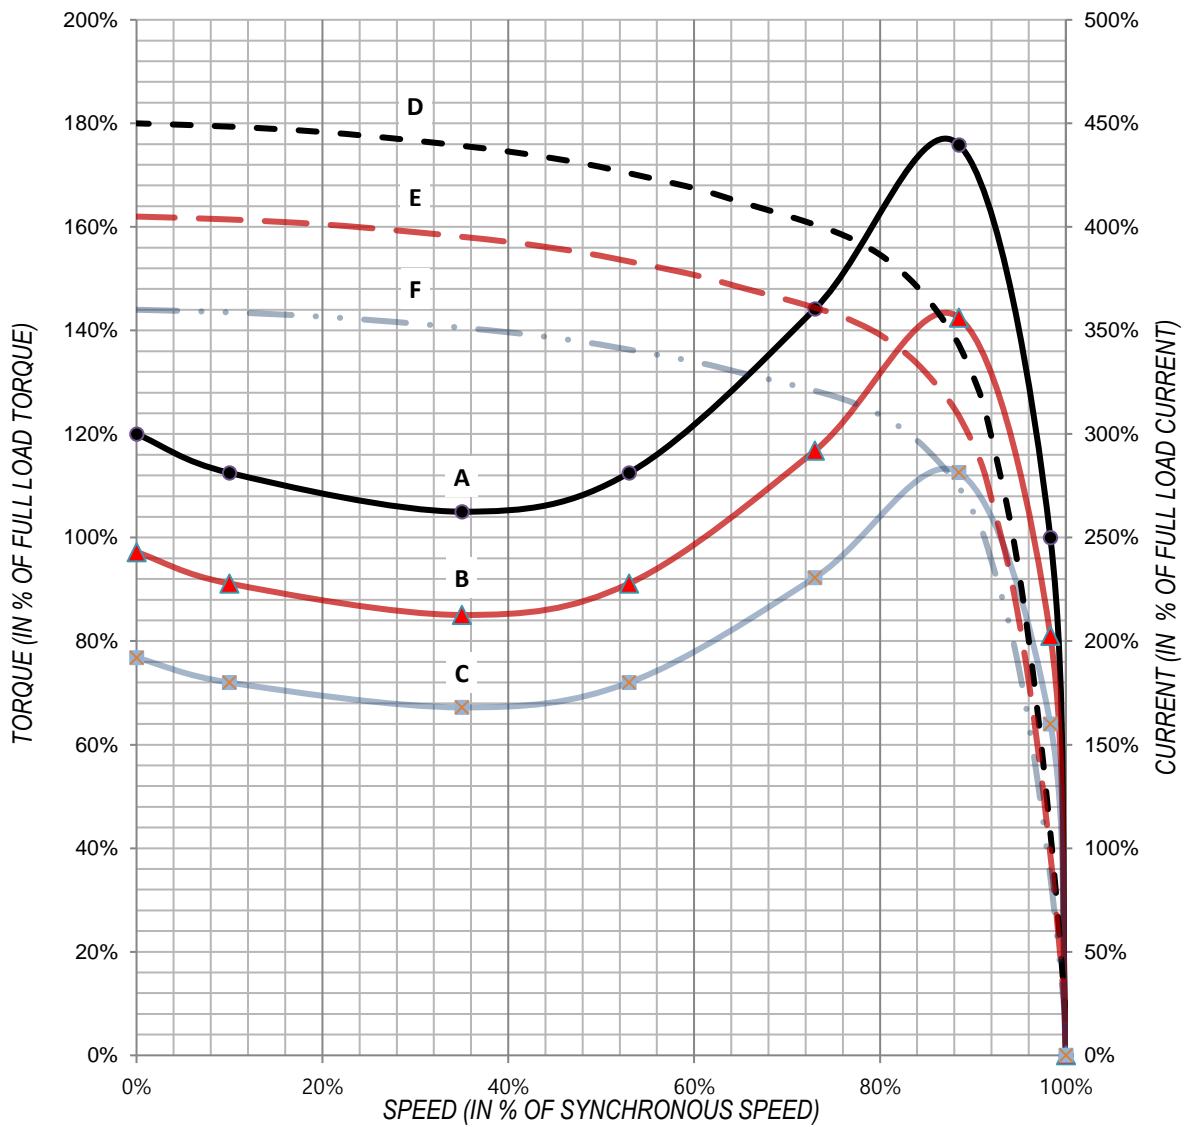

NOTE

- A : SPEED-TORQUE CURVE AT 100% RATED VOLTAGE
- ▲— B : SPEED-TORQUE CURVE AT 90% RATED VOLTAGE
- C : SPEED-TORQUE CURVE AT 80% RATED VOLTAGE
- - - D : SPEED-CURRENT CURVE AT 100% RATED VOLTAGE
- - - E : SPEED-CURRENT CURVE AT 90% RATED VOLTAGE
- · · F : SPEED-CURRENT CURVE AT 80% RATED VOLTAGE

HYOSUNG HEAVY INDUSTRIES	THERMAL LIMIT & TIME - CURRENT CURVE			Curve No.	
				1TL_D1ML7752	
OUTPUT	45 kW	POLES	8 P		
VOLTAGE	- V	FREQUENCY	60 Hz		
FULL LOAD TORQUE	49.5 kg·m	FULL LOAD CURRENT	- A		
LOCKED ROTOR TORQUE	120 %	LOCKED-ROTOR CURRENT	450 %		
BREAKDOWN TORQUE	180 %	SPEED (at FULL LOAD)	885 r/min		
GD ² of LOAD :	- kg·m ²	GD ² of MOTOR	8.54 kg·m ²		

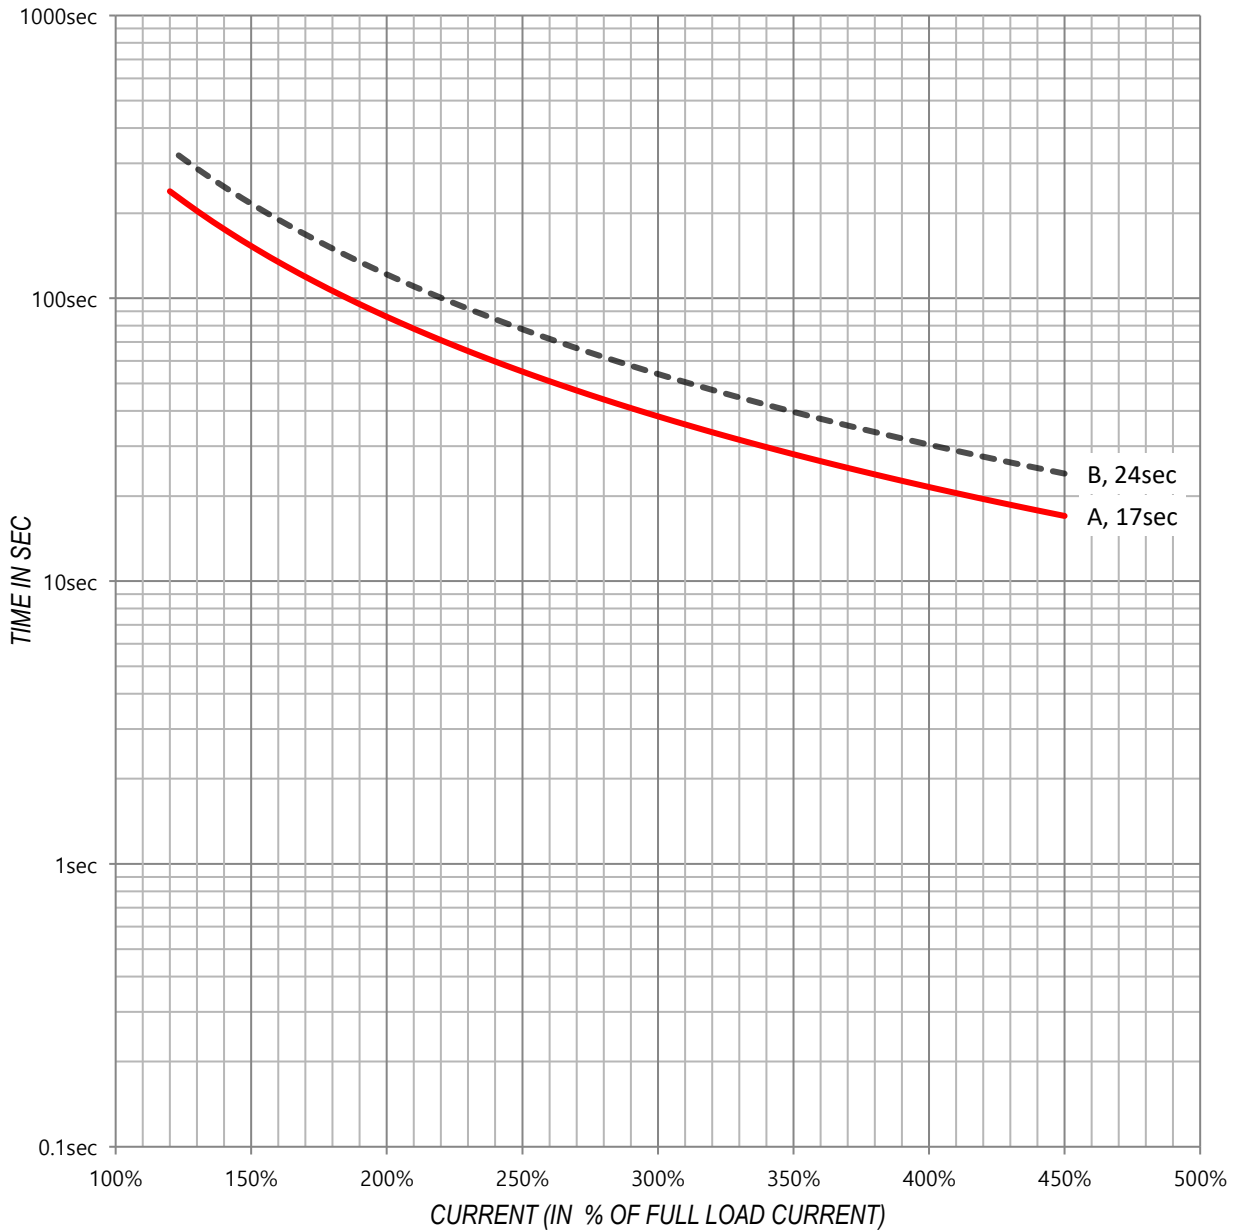


NOTE

- A : THERMAL LIMIT CURVE AT HOT CONDITION
- - - - - B : THERMAL LIMIT CURVE AT COLD CONDITION
- - - - - C ※TIME-CURRENT CURVES(C,D,E) NEED BELOW DATA TO BE DRAWN
- · - · - D * LOAD GD² AT MOTOR SHAFT
- · · · · E * SPEED-TORQUE CURVE OF LOAD

	LOAD - POWER FACTOR & EFFICIENCY CURVE		Curve No.	
			1PE_D1ML7752	

OUTPUT	45 kW	POLES	8 P
VOLTAGE	- V	FREQUENCY	60 Hz
FULL LOAD TORQUE	49.5 kg·m	FULL LOAD CURRENT	- A
LOCKED ROTOR TORQUE	120 %	LOCKED-ROTOR CURRENT	450 %
BREAKDOWN TORQUE	180 %	SPEED (at FULL LOAD)	885 r/min
GD ² of LOAD :	- kg·m ²	GD ² of MOTOR	8.54 kg·m ²

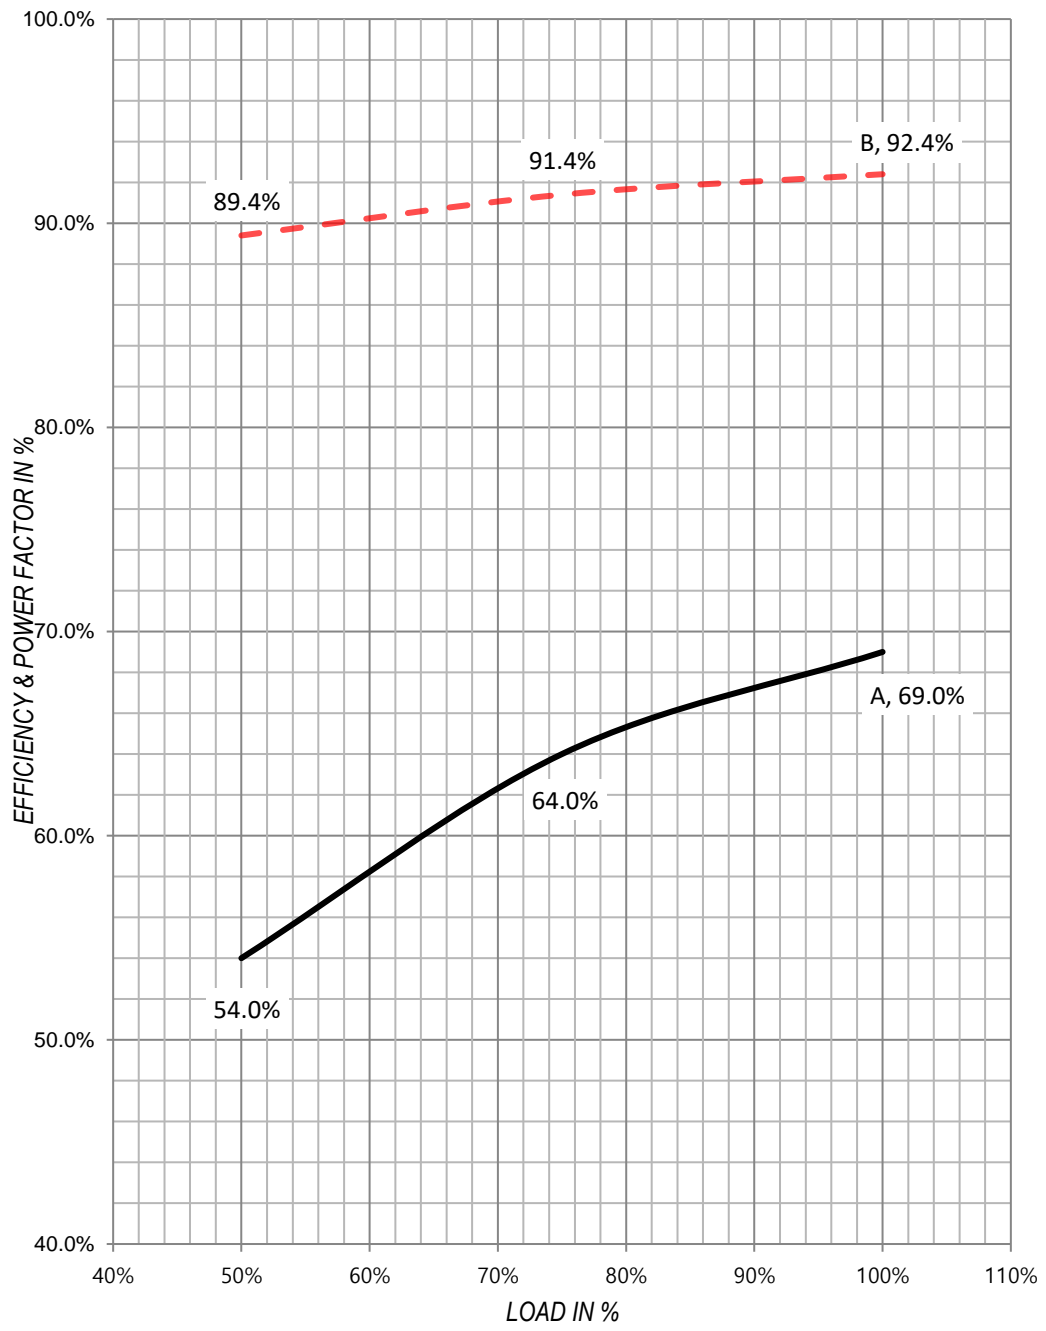

NOTE

A : LOAD - POWER FACTOR CURVE
 B : LOAD - EFFICIENCY CURVE