


SPEED - TORQUE & CURRENT CURVE

Curve No.
1ST_DSML21193M

OUTPUT	15 kW	POLES	4 P
VOLTAGE	- V	FREQUENCY	60 Hz
FULL LOAD TORQUE	8.2 kg·m	FULL LOAD CURRENT	- A
LOCKED ROTOR TORQUE	200 %	LOCKED-ROTOR CURRENT	650 %
BREAKDOWN TORQUE	250 %	SPEED (at FULL LOAD)	1775 r/min
GD ² of LOAD :	- kg·m ²	GD ² of MOTOR	0.522 kg·m ²

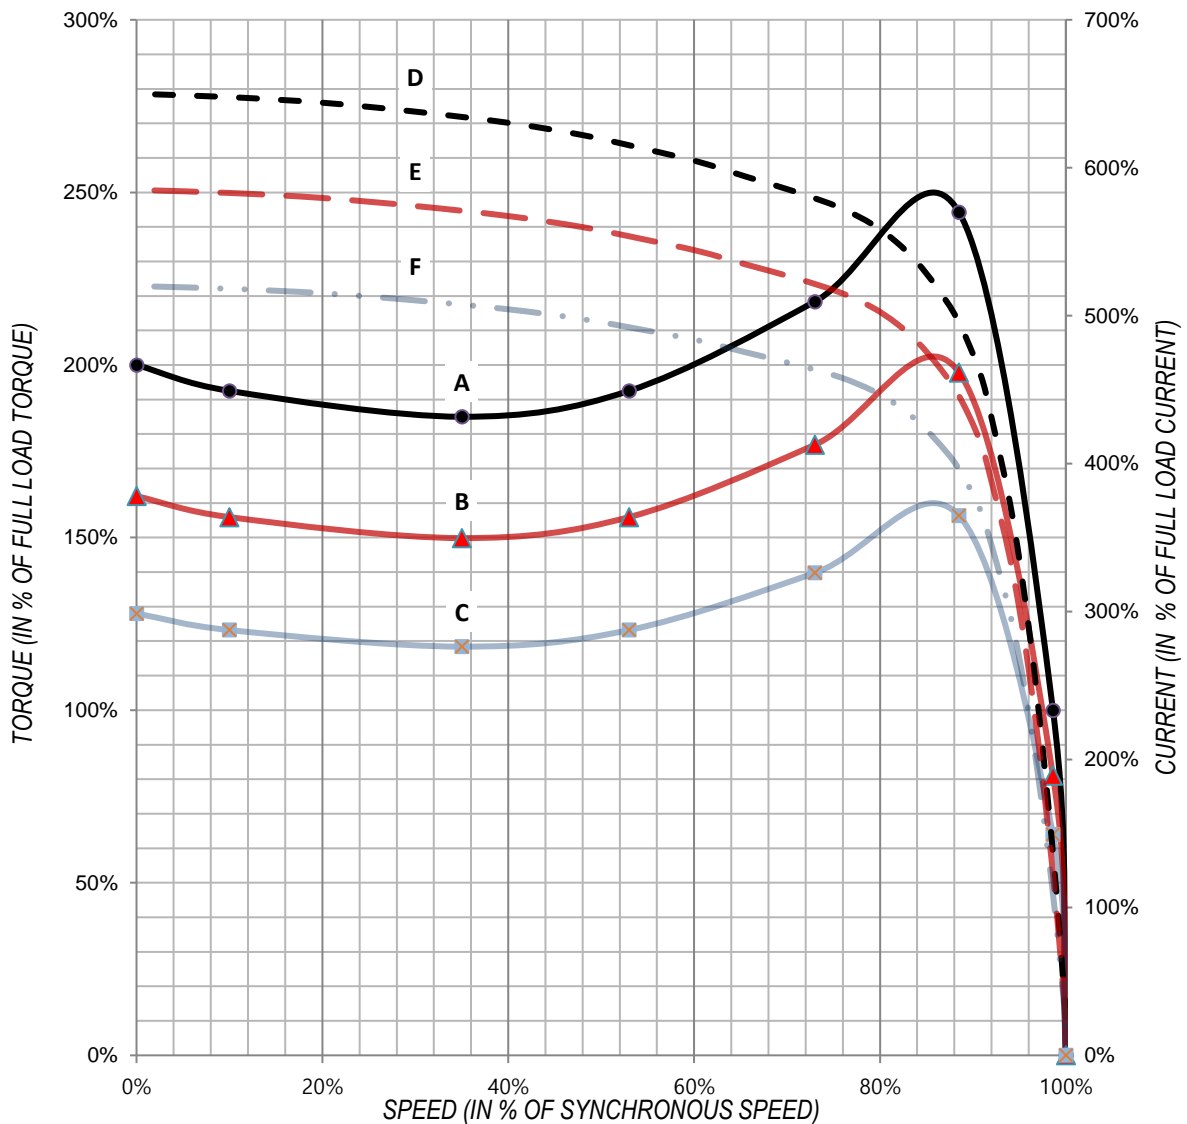


NOTE

- A : SPEED-TORQUE CURVE AT 100% RATED VOLTAGE
- ▲— B : SPEED-TORQUE CURVE AT 90% RATED VOLTAGE
- C : SPEED-TORQUE CURVE AT 80% RATED VOLTAGE
- - - D : SPEED-CURRENT CURVE AT 100% RATED VOLTAGE
- - - E : SPEED-CURRENT CURVE AT 90% RATED VOLTAGE
- · · F : SPEED-CURRENT CURVE AT 80% RATED VOLTAGE

	THERMAL LIMIT & TIME - CURRENT CURVE		Curve No.	
			1TL_DSML21193M	

OUTPUT	15 kW	POLES	4 P
VOLTAGE	- V	FREQUENCY	60 Hz
FULL LOAD TORQUE	8.2 kg·m	FULL LOAD CURRENT	- A
LOCKED ROTOR TORQUE	200 %	LOCKED-ROTOR CURRENT	650 %
BREAKDOWN TORQUE	250 %	SPEED (at FULL LOAD)	1775 r/min
GD ² of LOAD :	- kg·m ²	GD ² of MOTOR	0.522 kg·m ²

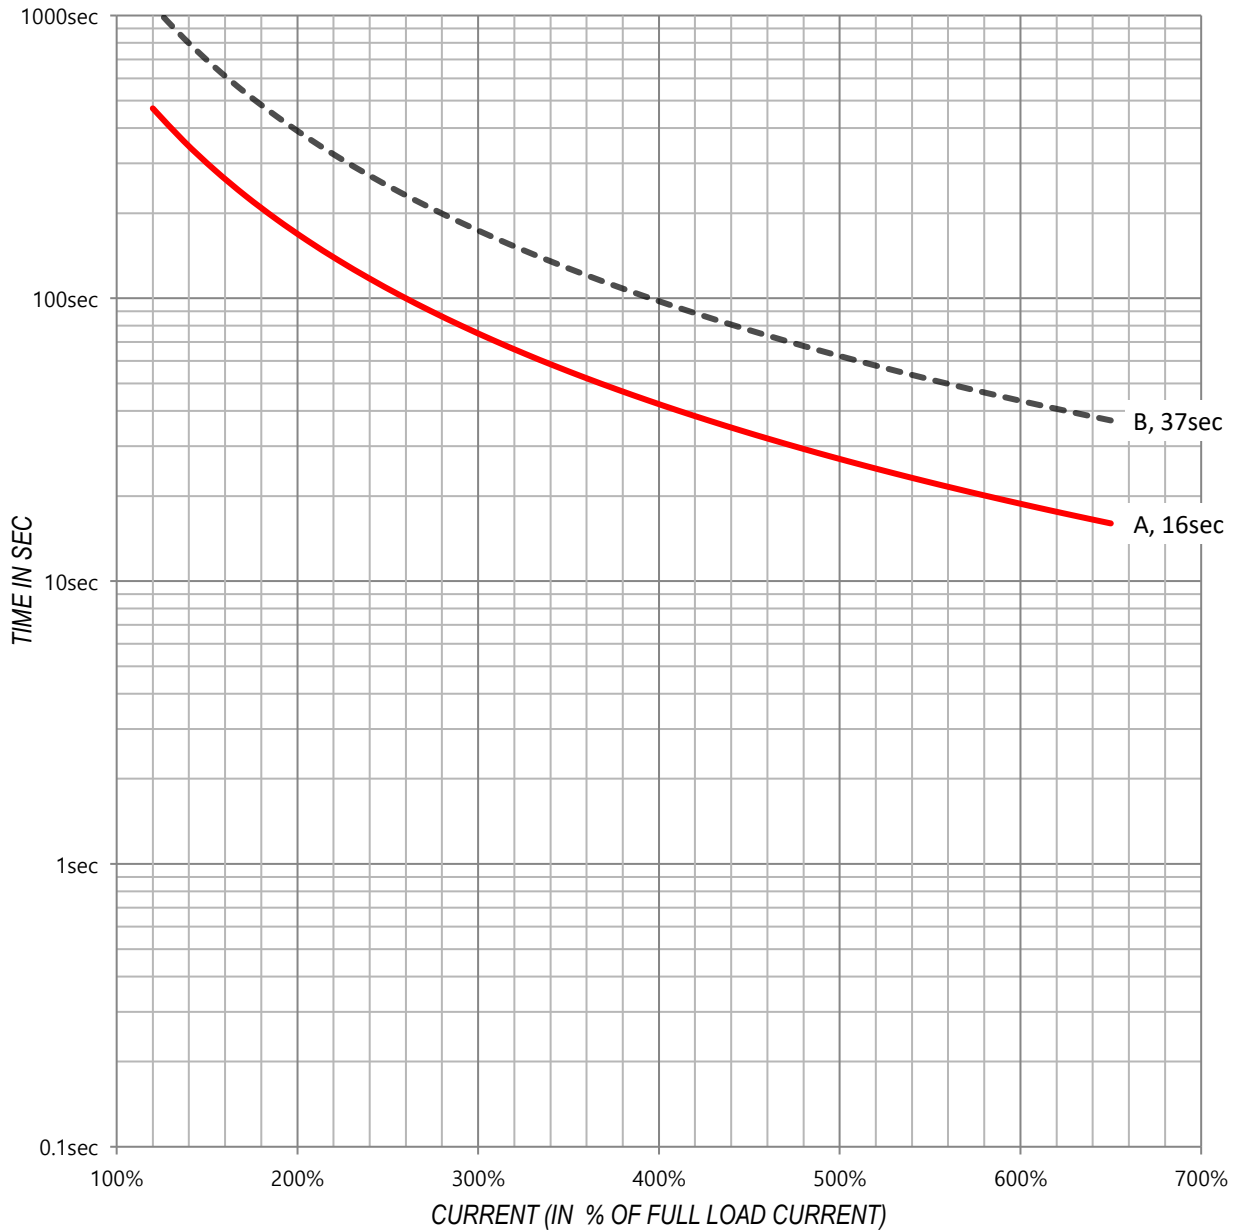


NOTE

- A : THERMAL LIMIT CURVE AT HOT CONDITION
- - - - - B : THERMAL LIMIT CURVE AT COLD CONDITION
- — — — C ✕ TIME-CURRENT CURVES(C,D,E) NEED BELOW DATA TO BE DRAWN
- · - · - D * LOAD GD² AT MOTOR SHAFT
- · · · · E * SPEED-TORQUE CURVE OF LOAD

LOAD - POWER FACTOR & EFFICIENCY CURVE

Curve No.	
1PE_DSML21193M	

OUTPUT	15 kW	POLES	4 P
VOLTAGE	- V	FREQUENCY	60 Hz
FULL LOAD TORQUE	8.2 kg·m	FULL LOAD CURRENT	- A
LOCKED ROTOR TORQUE	200 %	LOCKED-ROTOR CURRENT	650 %
BREAKDOWN TORQUE	250 %	SPEED (at FULL LOAD)	1775 r/min
GD ² of LOAD :	- kg·m ²	GD ² of MOTOR	0.522 kg·m ²

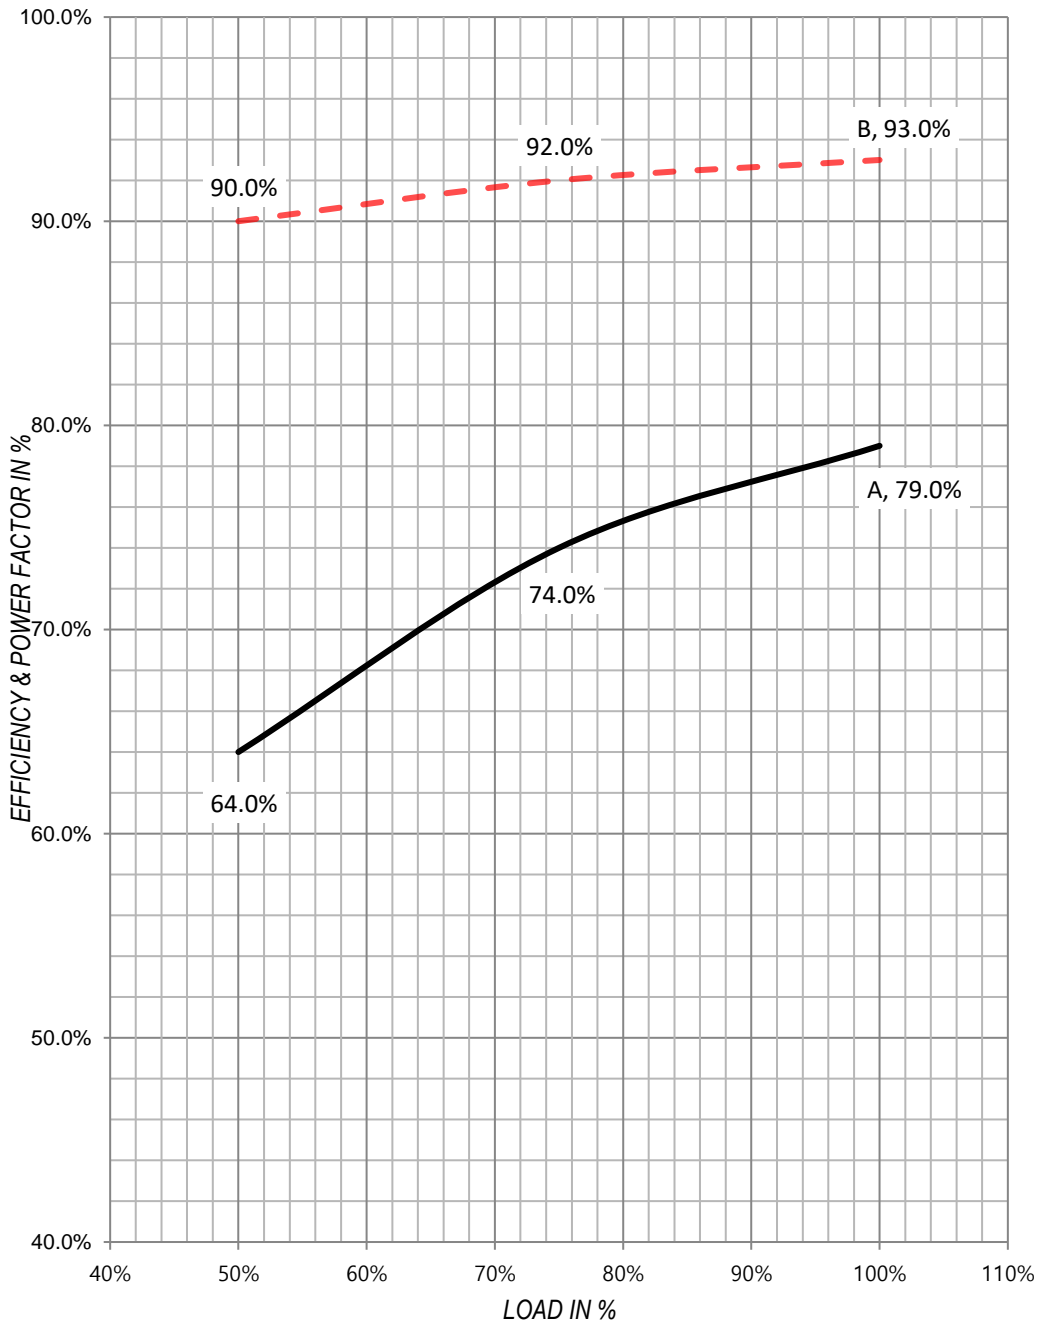

NOTE

— A : LOAD - POWER FACTOR CURVE

- - - B : LOAD - EFFICIENCY CURVE